

Z3 -/Z3oE - Stromkabel

Z3 -/Z3oE - Power cable



Das Stromkabel dient der elektrischen Verbindung des Heißkanals mit dem Regelgerät.

The power cable serves as the electrical connection between the hot runner and the controller.

HINWEISE:

- geprüfte Leitungen, 5 m lang
- nach DIN 16765-A
- wärmebeständige PVC-Leitungen, betriebsfertig angeschlossen an hochwertige Industriestecker
- lieferbar komplett konfektioniert und geprüft oder mit offenen Kabelenden für individuelle Werkzeuganschlüsse

Ausführung:

- Reglerseite gerader Abgang
- Formseite seitlicher Kabelabgang

NOTE:

- Tested cables, 5 m long
- As per DIN 16765-A
- Heat-resistant PVC cables, connected to high-quality industrial plugs ready for operation
- Available fully fabricated and tested or with open cable ends for individual mould connections

Type:


- Exits straight out on controller side
- Exits sideways on mold side



Z3



Z3oE

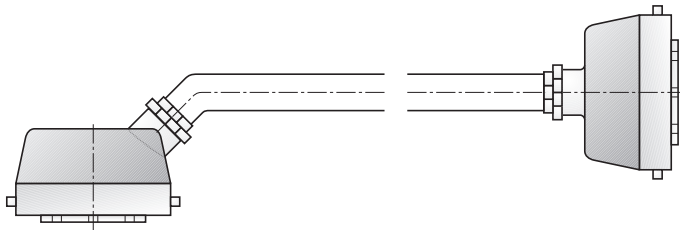

Bestell-Nr.	Stromkabel komplett	für max.
Order No.	Power cable, complete	for max.
Z3-4	4-polig, 5m lang <i>4-poles, 5 m long</i>	2 Zonen <i>2 zones</i>
Z3-10	10-polig, 5m lang <i>10-poles, 5 m long</i>	5 Zonen <i>5 zones</i>
Z3-16	16-polig, 5m lang <i>16-poles, 5 m long</i>	8 Zonen <i>8 zones</i>
Z3-24	24-polig, 5m lang <i>24-poles, 5 m long</i>	12 Zonen <i>12 zones</i>
Z3-32	32-polig, 5m lang <i>32-poles, 5 m long</i>	16 Zonen <i>16 zones</i>

Bestell-Nr.	Stromkabel offene Enden	für max.
Order No.	Power cable with open ends	for max.
Z3oE-4	4-polig, 5m lang <i>4-poles, 5 m long</i>	2 Zonen <i>2 zones</i>
Z3oE-10	10-polig, 5m lang <i>10-poles, 5 m long</i>	5 Zonen <i>5 zones</i>
Z3oE-16	16-polig, 5m lang <i>16-poles, 5 m long</i>	8 Zonen <i>8 zones</i>
Z3oE-24	24-polig, 5m lang <i>24-poles, 5 m long</i>	12 Zonen <i>12 zones</i>
Z3oE-32	32-polig, 5m lang <i>32-poles, 5 m long</i>	16 Zonen <i>16 zones</i>

Alle Angaben in mm
All specifications in mm